

HSF

NOTES:

Rated Current: 1.0AMP
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/DC
 Insulation Resistance: 1000MΩ min
 Operation Temperature: -40°C to +105°C



Contact Material: Phosphor Bronze
 Contact plating: Au Or Sn over Ni
 Insulator Material: PBT+30%G.F UL94V-0

Ordering Information

5232-XX U P XX B X 0 1


No. of Pins	Contact Plating:	Color:	Bump
06=6P	S0=Gold Flash/Ni	B=Black	N=W/O Bump
10=10P	S3=10u"Gold/Ni	G=Grey 427C	W=With Bump
20=20P	S4=15u"Gold/Ni	E=Grey 413C	
30=30P	S5=30u"Gold/Ni	SN=Tin	
40=40P			
50=50P			
60=60P			
80=80P			

Item	Pitch	Mating
Standard	1.27	3130/3132/3230
Alternate		

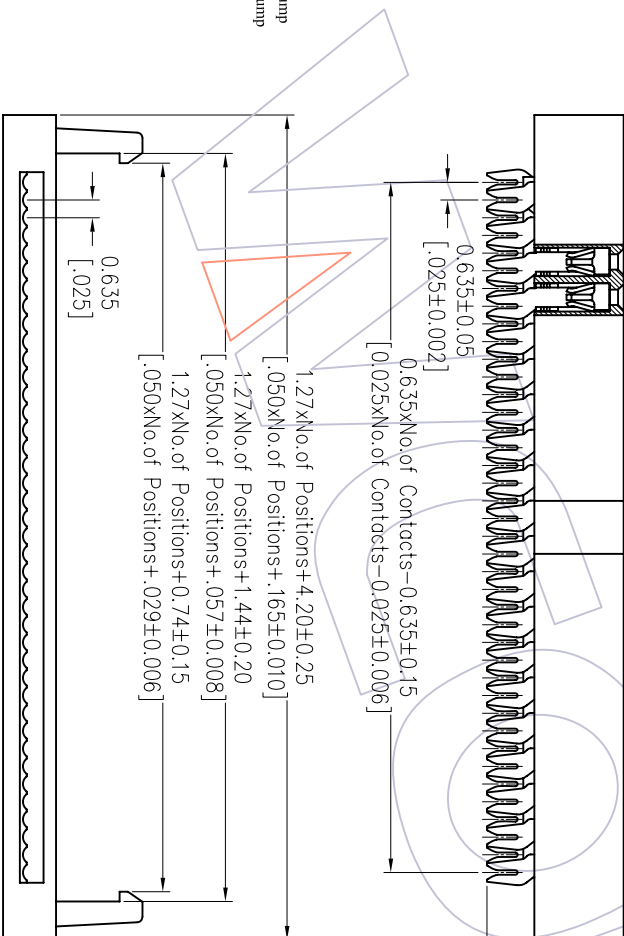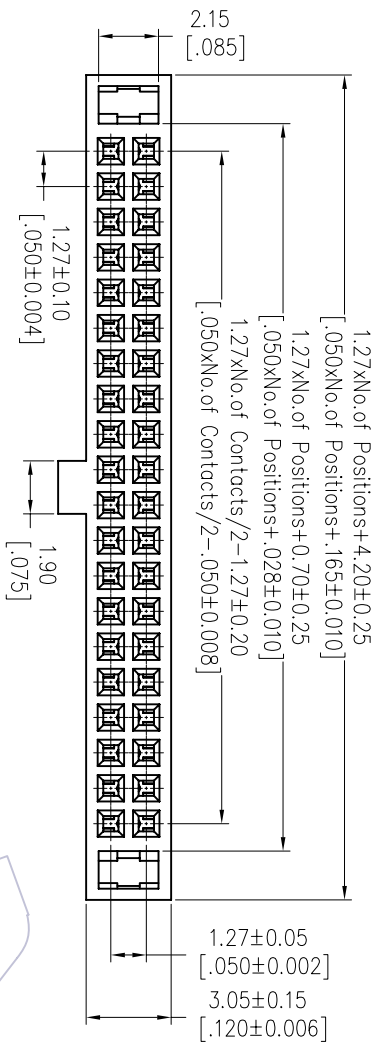

W=With Bump

N=W/O Bump

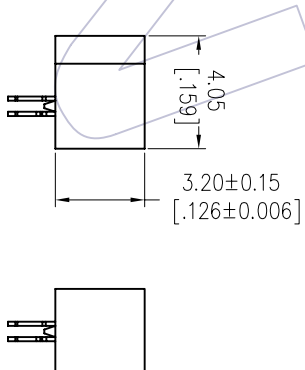

OPERATION		DRAW		DATE		SCALE		PART NO.	
XX	±0.40	JYHuang	CHECK	2012/10/10	mm	5232-XXUPXXBX01	TITLE:		
XX	±0.25		APPROVE		A4	1.27mm IDC SOCKET	Customer NO.		
XX	±0.15		CHANGE		1/1		Customer NO.		
XX	±3°		DIW		PROJ.		Customer NO.		
REV		DATE		MODIFICATION DESCRIPTION		Customer NO.			
A0	2012/10/10	NEW							

WCON

Http: www.wcon.com

WCON-Dongguan
 Tel: +86 769 85358920
 Fax: +86 769 85358915
 E-mail: sales@wcon.com

WCON-Kunshan
 Tel: +86 512 57468408
 Fax: +86 512 57468468
 E-mail: sales@wcon.com