

# HSF

Recommended P.C.B Layout(Top Side)  
(PCB BOARD TOLERANCE±0.05)

**NOTES:**


- Current Rating: 2.0AMP
- Contact Resistance: 20mΩ Max
- Withstand Voltage: 500V AC/DC
- Insulation Resistance: 1000MΩ Min
- Operation Temperature: -40°C to +105°C
- Contact Material: Phosphor Bronze
- Contact plating: Au Or Sn over Ni
- Insulator Material: LCP+30%G.F UL94V-0



## Ordering Information

2263 - 2 XX M XX D Y N T X

- No of Pins per ROW: 02-40PIN
- Contact Plating: GM=Gold Flash, G3=10μm Gold, G4=15μm Gold, G5=30μm Gold
- Insulator: D=LCP, T=Tube, P=Tube+CAP, R=Tapex+Recst+CAP
- Packaging: S0=Gold Flash/Tin, S3=10μm Gold/Tin, S4=15μm Gold/Tin, S5=30μm Gold/Tin, SN=Tin, SM=Matte Tin

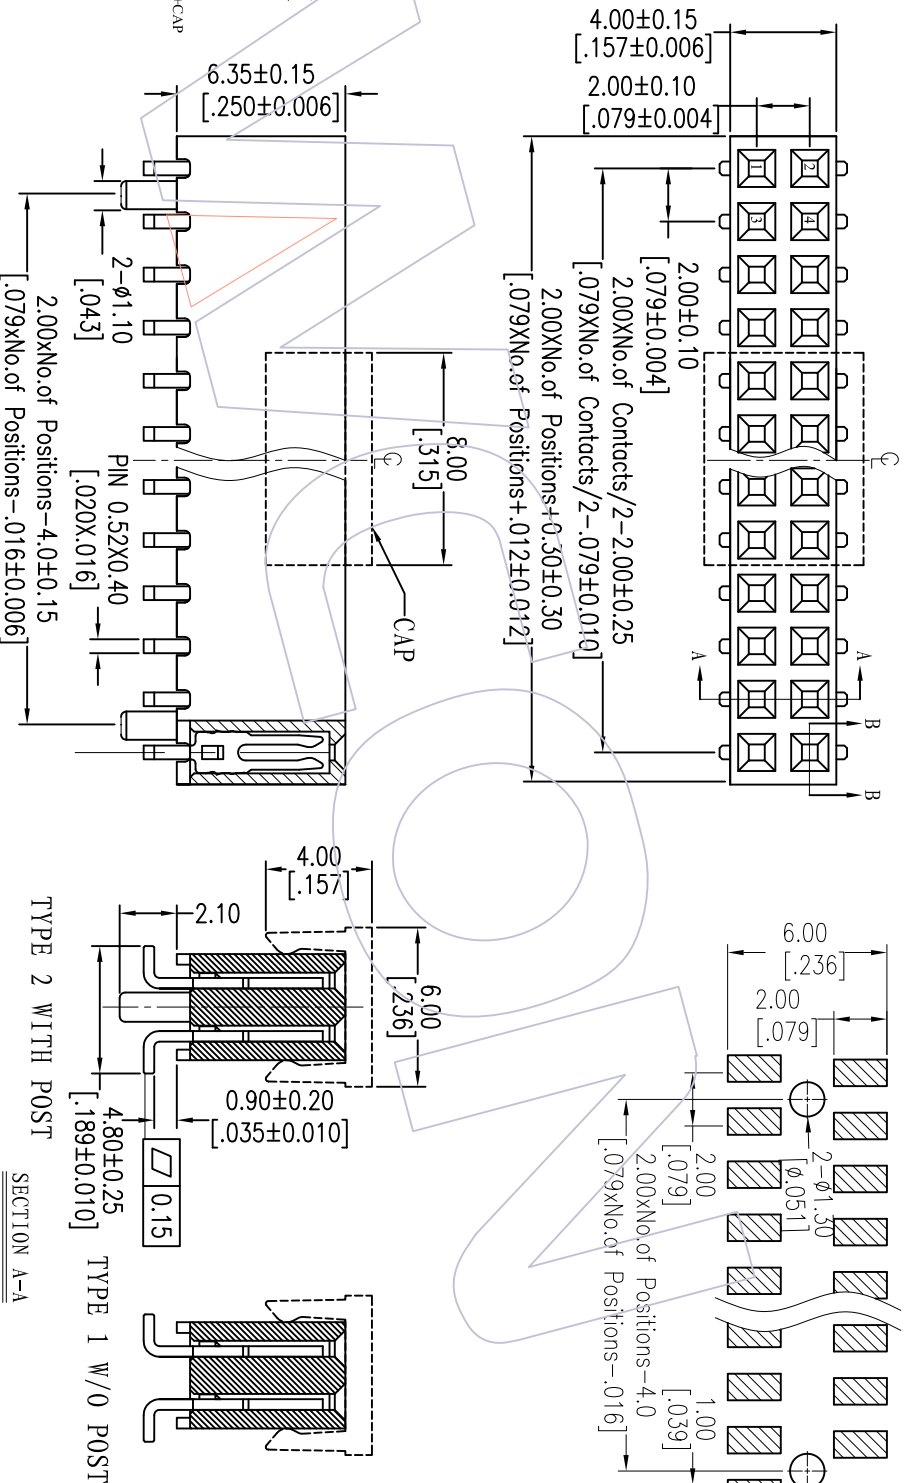

Item	Pitch	Mating
Standard	2.00	1215/1220
Alternate		

TITLE	PART NO.
TYPE 1	2263-2XXMXXDYN1
TYPE 2	2263-2XXMXXDYN2

A1	2013/03/15	Modify drawing	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.
A0	2012/07/23	NEW	X.XX	Wrong	2013/03/15	UNIT	mm	SEE TABLE
REV	DATE	MODIFICATION DESCRIPTION	X.XXX	CHECK	DATE	SIZE	A4	TITLE:
			Angle	APPROVE	DATE	SHEET	1/1	PH2.00mm DUAL ROW 180° SWT H=6.35
			DM	TOL	PROJ.	Customer NO.		

# WCON

Http: [www.wcon.com](http://www.wcon.com)

WCON-Dongguan  
Tel: +86 769 85358920  
Fax: +86 769 85358915  
E-mail: [sales@wcon.com](mailto:sales@wcon.com)

WCON-Kunshan  
Tel: +86 512 57468408  
Fax: +86 512 57468468  
E-mail: [sales@wcon.com](mailto:sales@wcon.com)