


HSF

Recommended P.C.B Layout(Top Side)
(PCB BOARD TOLERANCE±0.05)


NOTES:
 Rated Current: 1.0AMP
 Rated Voltage: 50V AC/DC
 Contact Resistance: 20mΩ max
 Withstand Voltage: 500V AC/Minute
 Insulation Resistance: 500MΩ min
 Operation Temperature: -25℃ to +85℃
 Insulator Material: PA6T+30%G.F UL94V-0

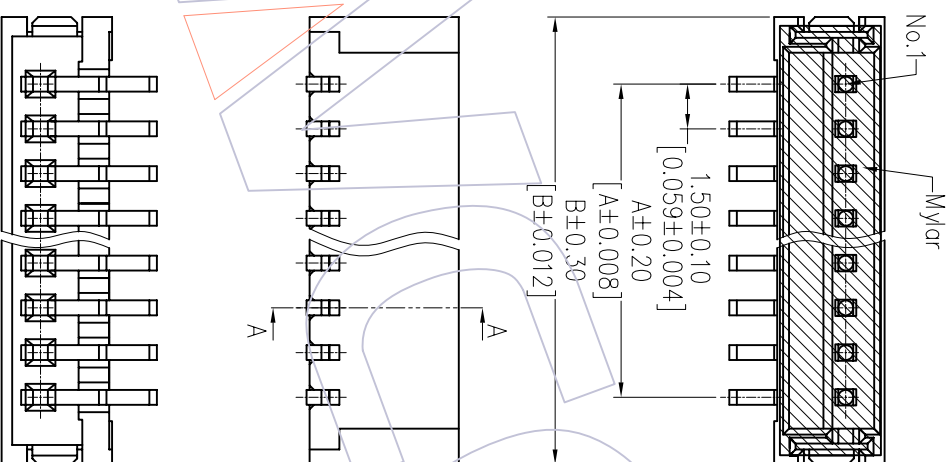

Ordering Information

WF1501 - WM XX X R 1

No of pins Contact Plating Color Packing
 02~15P Sp=Gold Flash/Tin B=Black R=Reel
 S3=10u"Gold/Tin T=Natural W=White
 S4=15u"Gold/Tin I=Beige
 S5=30u"Gold/Tin
 G0=Gold Flash
 G3=10u"Gold
 G4=15u"Gold
 G5=30u"Gold
 Blank=Tin

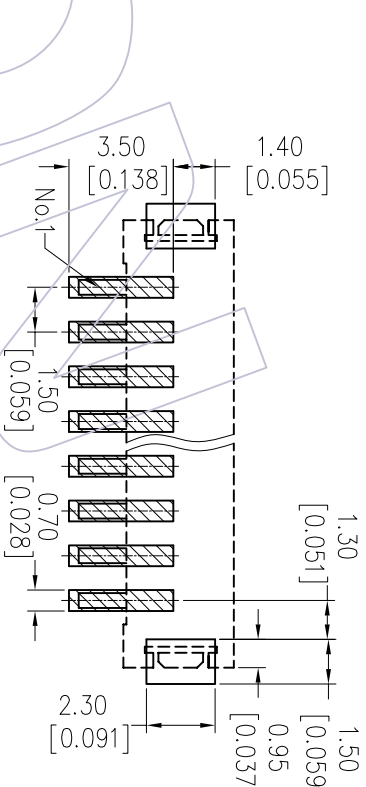

Specification & Ordering Information:

Circuit	Part No.	Dimension		Qty /Reel
		A	B	
02	WF1501-WM02XR1	1.50	6.00	1,000
03	WF1501-WM03XR1	3.00	7.50	1,000
04	WF1501-WM04XR1	4.50	9.00	1,000
05	WF1501-WM05XR1	6.00	10.50	1,000
06	WF1501-WM06XR1	7.50	12.00	1,000
07	WF1501-WM07XR1	9.00	13.50	1,000
08	WF1501-WM08XR1	10.50	15.00	1,000
09	WF1501-WM09XR1	12.00	16.50	1,000
10	WF1501-WM10XR1	13.50	18.00	1,000
11	WF1501-WM11XR1	15.00	19.50	1,000
12	WF1501-WM12XR1	16.50	21.00	1,000
13	WF1501-WM13XR1	18.00	22.50	1,000
14	WF1501-WM14XR1	19.50	24.00	1,000
15	WF1501-WM15XR1	21.00	25.50	1,000

REV	DATE	MODIFICATION DESCRIPTION	CHANGE
AO	2012/09/03	NEW	

OPERATION	DRAW	DATE	SCALE	FIT
XX	JYHuang	2012/09/03	UNIT	mm
XX	CHECK	DATE	SIZE	A4
XX	APPROVE	DATE	SHEET	1/1
Angle			PROJ.	
± 3'				

PART NO. SEE TAB
 TITLE: ZH 1.50 WAFER 180° SMT
 Customer NO.

WCON

WCON-Dongguan Tel: +86 769 85358920
 WCON-Kunshan Tel: +86 512 57468408
 WCON-Fax: +86 769 85358915
 WCON-Fax: +86 512 57468468
 WCON-E-mail: sales@wcon.com
 WCON-E-mail: sales@wcon.com