

NOTES:


- Current Rating:1.5AMP
- Contact Resistance:20mΩ max
- Withstand Voltage:500V AC/DC
- Insulation Resistance:1000MΩ min
- Operation Temperature:-40℃ to +105℃
- Contact Material:Brass
- Contact plating:Au or Sn Over Ni
- Insulator Material:PA9T+30%GF(UL94V-0)

Ordering Information

3111-XX R XX B K00 X 2

- No. of Pins
- Contact Plating
- Color Insulator
- Packing
- G0=Gold Flash
- G1=3u"Gold
- G2=5u"Gold
- G3=10u"Gold
- G4=15u"Gold
- G5=30u"Gold
- SO=Gold Flash/Tin
- S1=3u"Gold/Tin
- S2=5u"Gold/Tin
- S3=10u"Gold/Tin
- S4=15u"Gold/Tin
- S5=30u"Gold/Tin
- SN=Tin
- B=Black
- U=Blue
- W=White
- A=Tray
- T=Tube

Item	Contact Length	Mating
Standard	4.00	5222 5224 5225
Alternate		

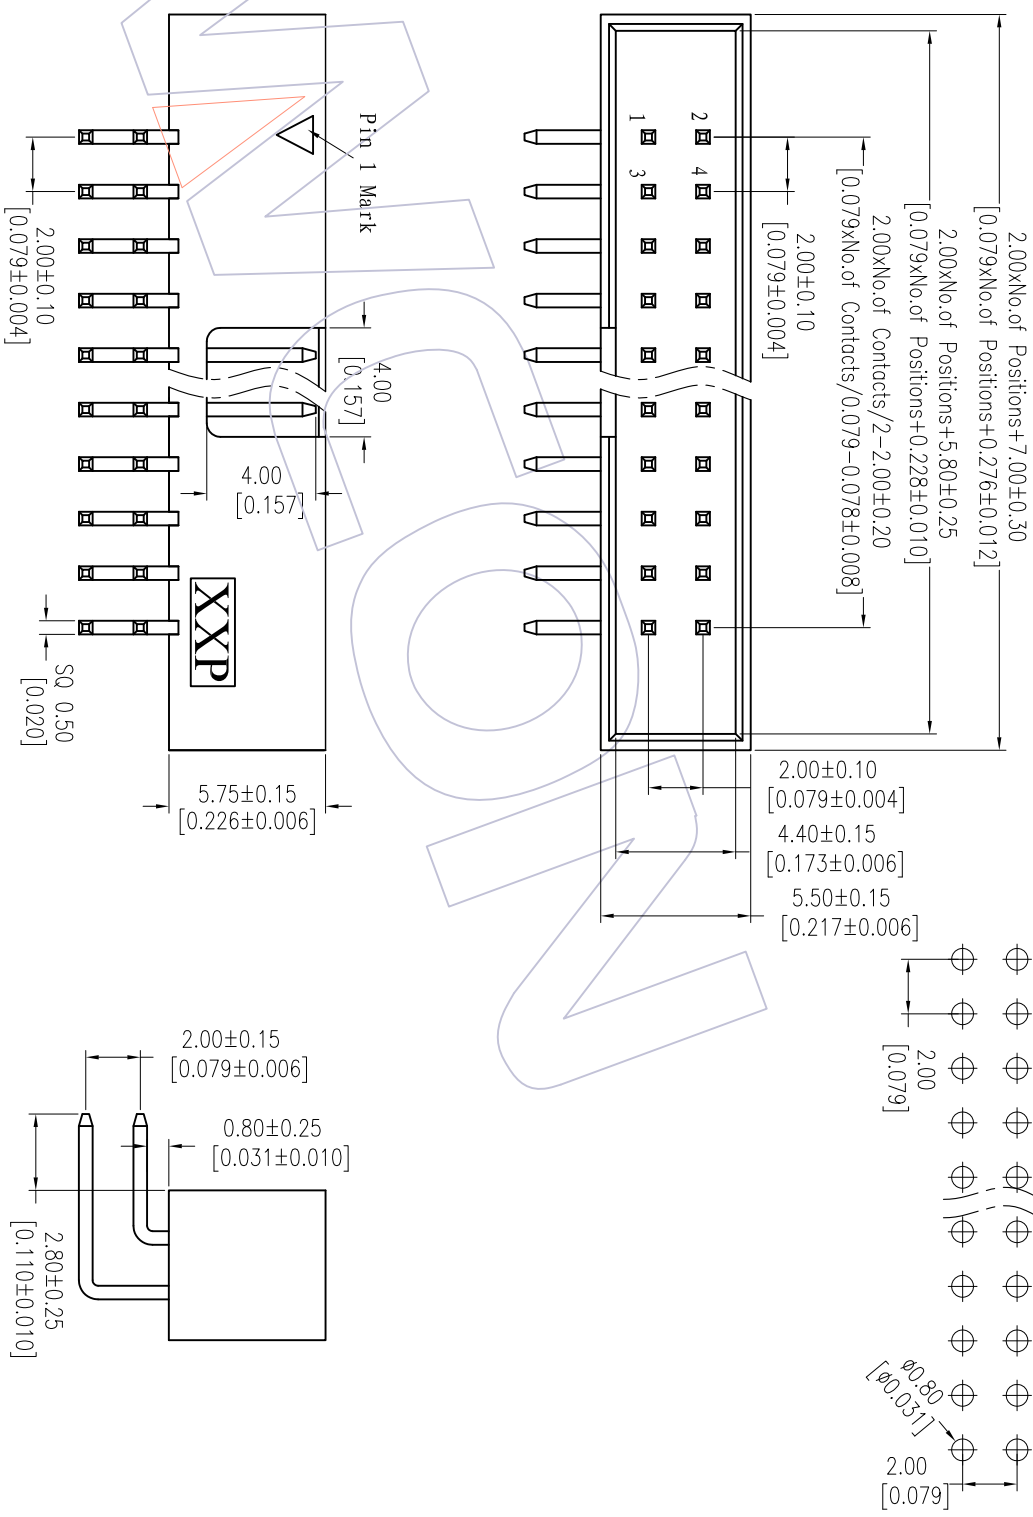

REV	DATE	MODIFICATION DESCRIPTION	CHANGE	OPERATION	DRAW	DATE	SCALE	FIT	PART NO.	TITLE:	WCON-Dongguan	WCON-Kunshun
A0	2012/05/31	NEW		XX	TsingSn	2012/05/31	UNIT	mm	3111-XXXXXXBK00X2	2.00 BOX HEADER 90° H=5.7	Tel: +86 769 85358920	Tel: +86 512 57468408
				XX	CHECK	DATE	SIZE	A4			Fax: +86 769 85358915	Fax: +86 512 57468468
				X.XXX	APPROVE	DATE	SHEET	1/1			E-mail: sales@wcon.com	E-mail: sales@wcon.com
				Angle			PROJ.					
				± 3'								
				DIM								
				TOL								



Http: www.wcon.com

WCON-Dongguan
Tel: +86 769 85358920
Fax: +86 769 85358915
E-mail: sales@wcon.com

WCON-Kunshun
Tel: +86 512 57468408
Fax: +86 512 57468468
E-mail: sales@wcon.com